


Montaggio interruttori scatolati

T.I.C. / P.I. P=125 / P=218

Installation of MCCB

T.I.C. / P.I. D=125 / D=218

LAFER
Simple ideas for great projects | Ibérica

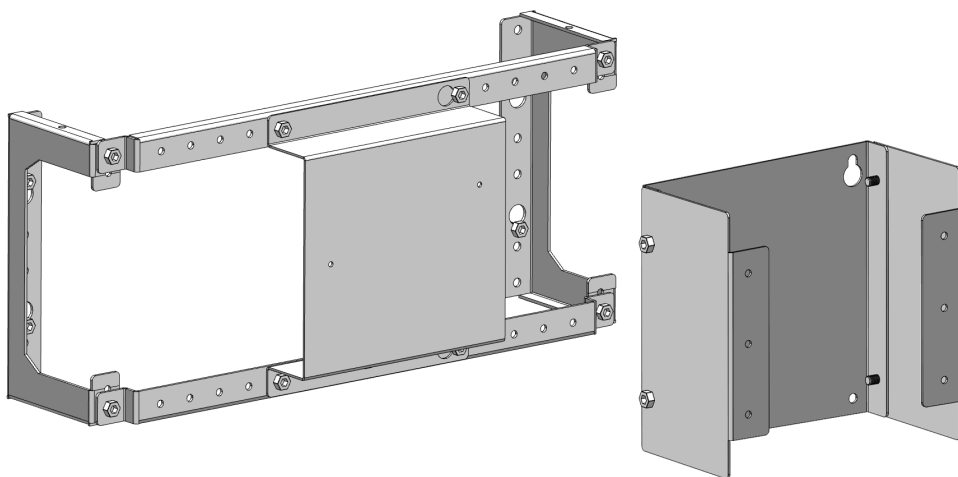


LAFER IBÉRICA CUADROS ELÉCTRICOS, S.L.
Polígono Industrial Mediterráneo
Calle Senyera Nave 1 - 46560 Massalfassar Valencia (España)
T. (+34) 637 894 150 - laferiberica@laferiberica.com

lafer.com

Montaggio interruttori scatolati su telaio interno di cablaggio (T.I.C.)



MCCB installation - wiring frame (T.I.C.)

T.I.C. P=125 mm

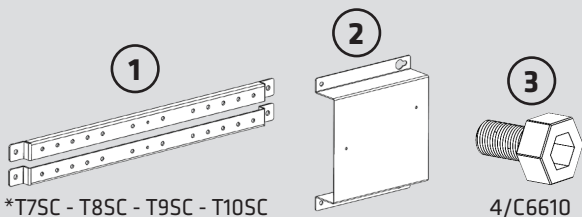


*I codici indicati variano in funzione della larghezza della struttura
 *Product codes may vary depending on the column length




T.I.C. P=218 mm




P=125 mm

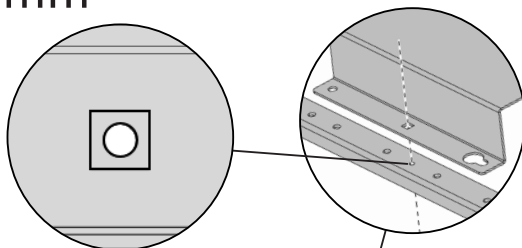


Coppia di serraggio Max tightening torque	
20 Nm	M6

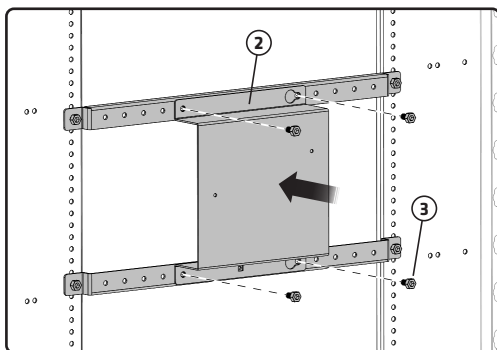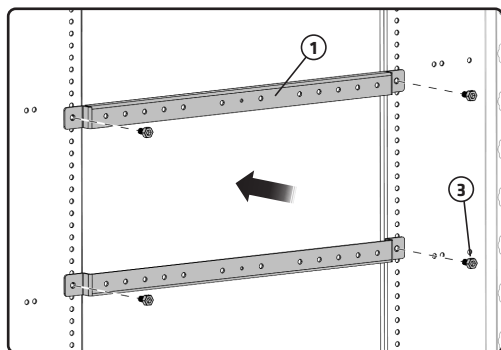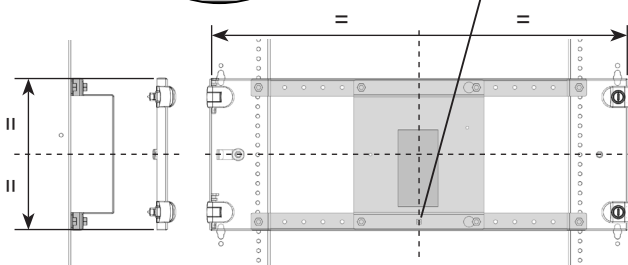




P=218 mm







mm 10

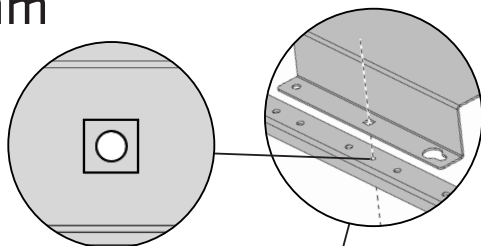

Coppia di serraggio
Max tightening torque

20 Nm





M6

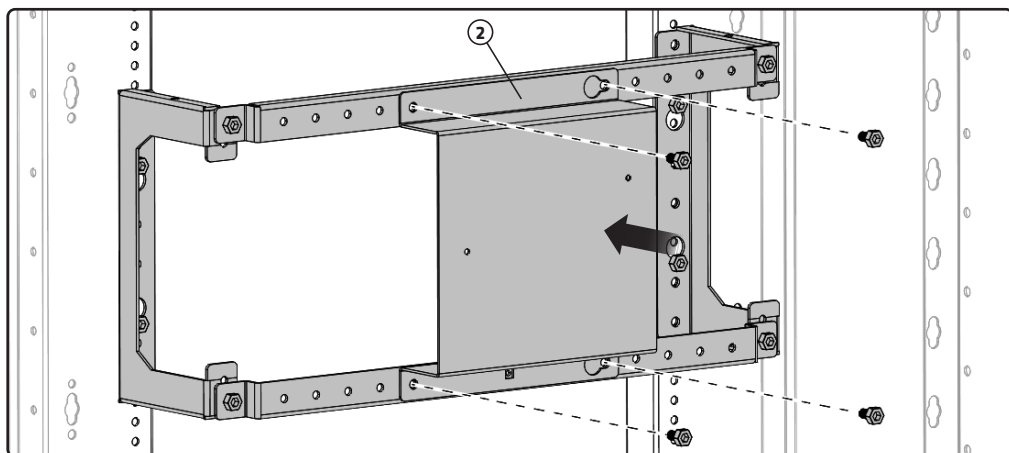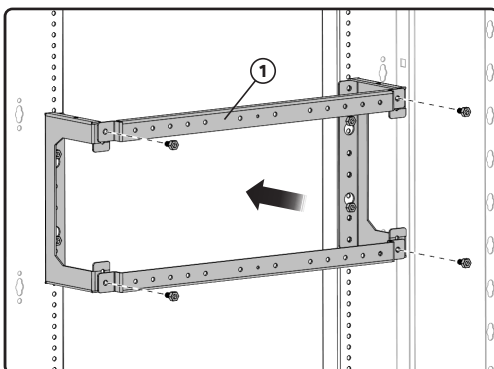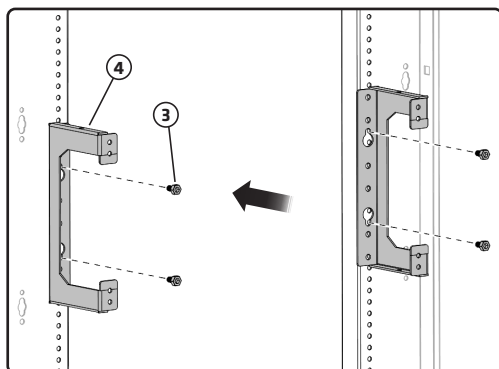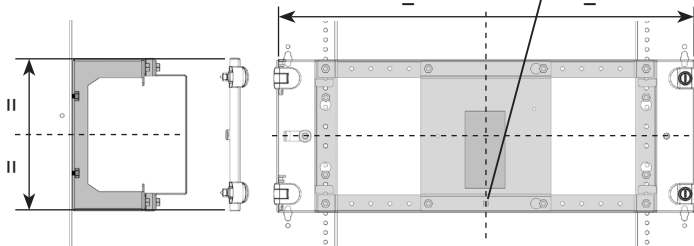

Montaggio interruttori scatolati su piastra di fondo (P.I.)

MCCB installation on plate (P.I.)

cod. ISTR_00093

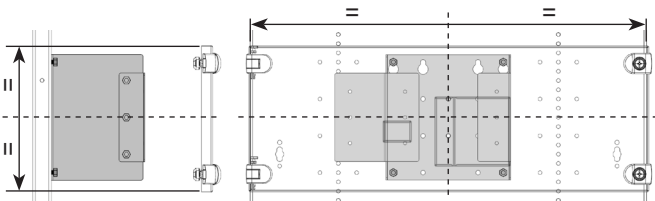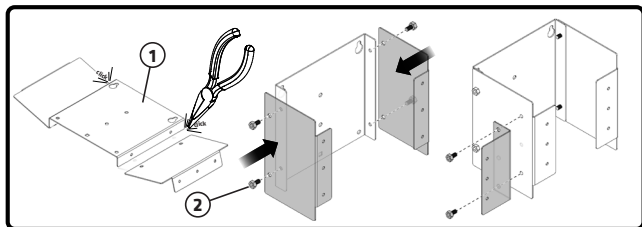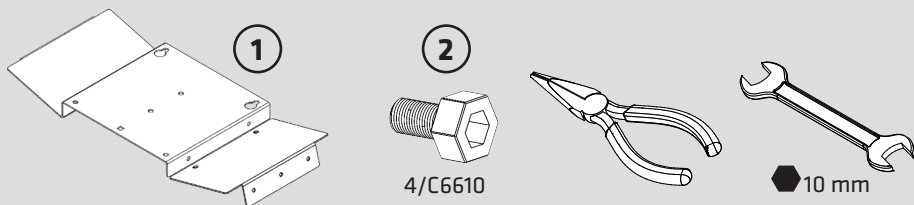

Coppia di serraggio Max tightening torque	
20 Nm	M6

